

## Construction


### FEATURES:

- Indoor or Outdoor Applications
- Permanent or Portable Installation
- Bi-Directional Knurled Tread, Diamond Plate or Non Skid Quad Surface Options
- Complies with ANSI, BOCA, SBCCI, CABO and Florida SREF Codes
- Easy Installation
- 1' Long for Every Inch in Height
- Rest Landings Required Every 24'
- Starter Ramps & Transition Wedges Combined with Standard Decks to Build Ramps
- Transition Wedges Available in 4' or 8' Lengths and Up or Down Options
- Wunderstructure and Fixed or Adjustable Leg Support Packages
- Deck Side Mount Guardrail Receivers Provide Convenient Guardrail Installation on Standard Decks
- Custom Designs Available


### NEVER USE GUARDRAIL WITHOUT CLAMP DEVICE

### ADDITIONAL OPTIONS:

- |  |         |
|--|---------|
| • 4' Wide x 4' Long Diamond Plate Starter Ramp | 55 lbs. |
| • 4' Wide x 8' Long Diamond Plate Starter Ramp | 89 lbs. |
| • 5 1/4" Wide x 4' Long Transition Wedge       | 18 lbs. |
| • 5 1/4" Wide x 8' Long Transition Wedge       | 27 lbs. |
| • 8' Long ADA Starter Ramp Guardrail           | 68 lbs. |

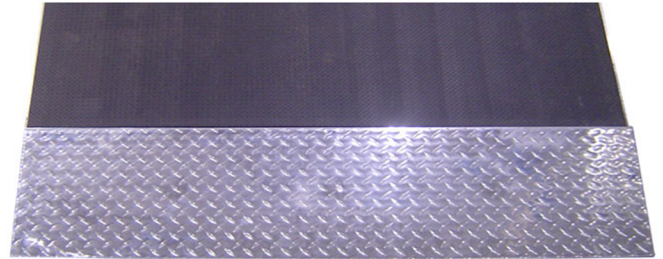

1' X 4' Diamond Plate Starter Ramp Front View

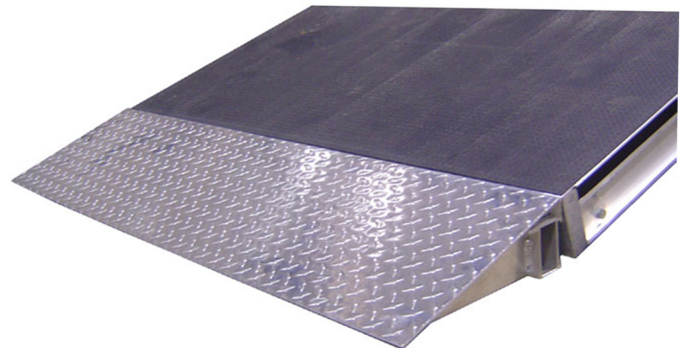

1' X 4' Diamond Plate Starter Ramp Side View

