

**Construction**

**Features:**

- 6005-T5 EXTRUDED Aluminum Frame & Corners
- 1" Thick 9-Ply Marine Grade Plywood
- Grade 5 Zinc Plated Bolts
- #10 Zinc Plated Bolts
- Certified live weight load of 200 lbs per square foot
- Nylock nuts eliminate vibration and noise interference
- Dual Lock™ locking system activated from top or bottom of decks
- Center Support Brace
- Custom 45 degree corners for use with scaffold systems

**Weight:**

- Approx. 129-137 Pounds, Depending on Surface (4' x 8' Stage Deck)

**Standard surface options include:**


- Non-Skid Quad
- Smooth Haircell Polyvinyl
- Pepper Grey Carpet
- Black Carpet
- Clear Plexi
- Milk Plexi
- Unfinished Plywood

The Quad or Poly surfaces can be treated to become weather resistant. Unfinished plywood can be finished with stain, clear polyurethane or flame retardant black paint.

**Custom surfaces include:**

- Plyron
- Diagonal Punch Aluminum Plank
- Tongue & Groove
- Custom Carpet


All surface options with the exception of the grated aluminum or Diagonal Punch Aluminum Plank are easily removable and can be interchanged to provide versatility to our decks. Custom surfaces available.

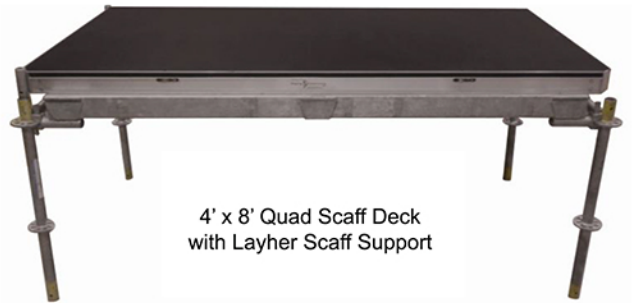

4' x 8' Quad Scaff Deck  
with Layher Scaff Support



45 Degree Corner

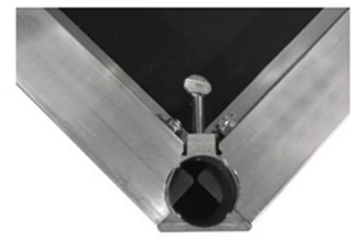

Underside of Corner




Male Dual Lock



Female Dual Lock



Center Brace



Close Up of Corner with Rosette  
on Layher Scaff System